

# MARION COUNTY SURVEYOR'S OFFICE



## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR

SEC. 29 TWN. 15<sub>N</sub> RNG. 3<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 7-21-09  
Party Chief: Wilcoxen  
Crew: Finney  
Type of Marker: Harrison  
Method of Establishment: County: 10-14-1994  
IN S.P.C. E Zone, NAD 83  
Name: 15032901  
N: 496 607.391 1(m)  
E: 51 310.180 3(m)

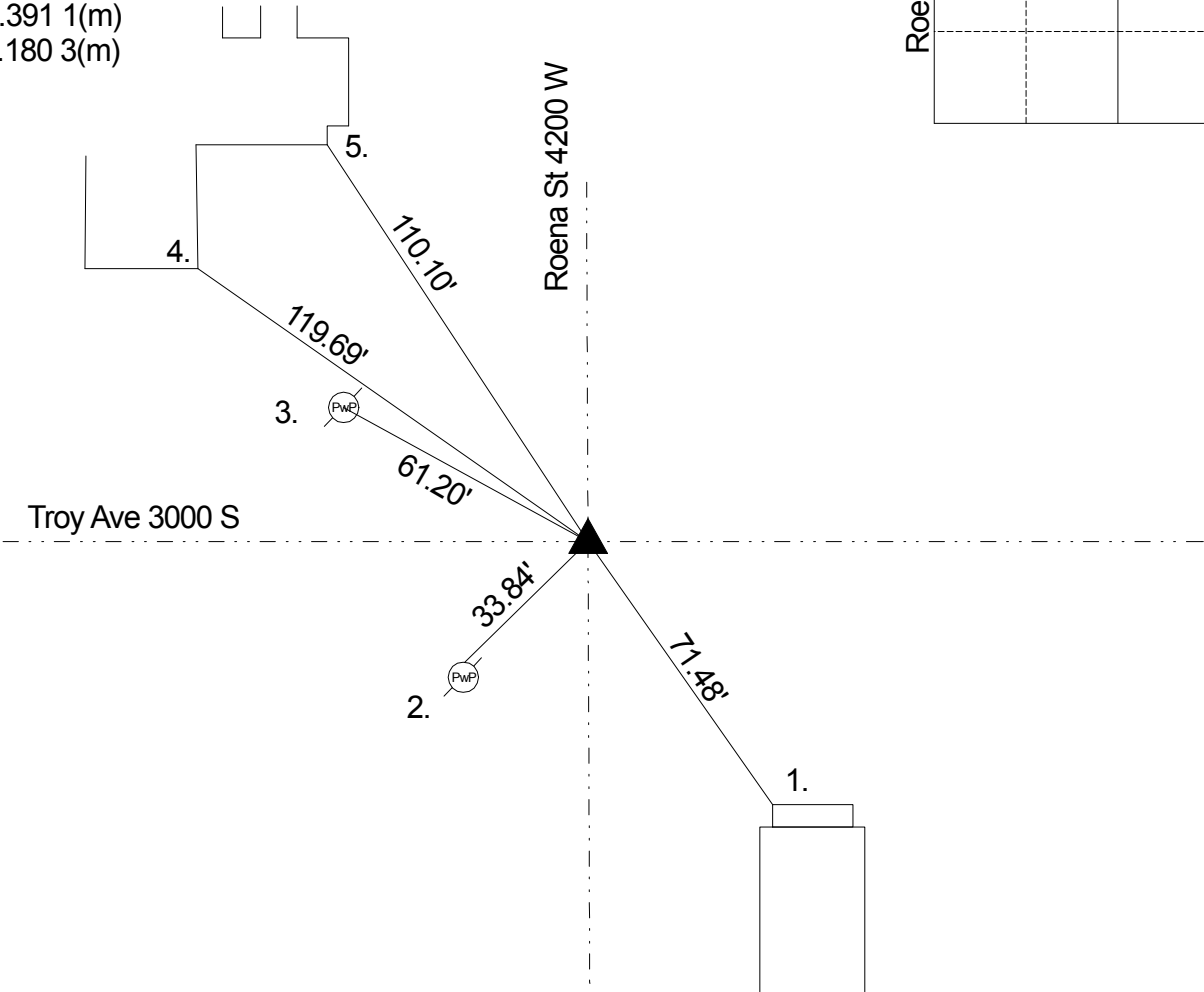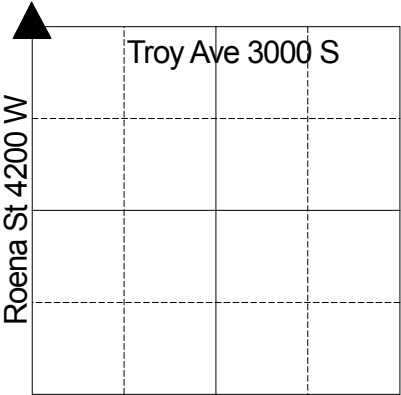

Original post set 1820 by Wm. B Laughlin with witnesses: 18" black walnut N 72 W 19 links, 12" hickory S 66 E 21 links per Marion County Atlas pg. 6. Survey by Fatout 10/27/1881 indicates no stone or witnesses per Decatur Township Legal Book pg. 7. Corner referenced 4/5/1944 called an iron pin set. Miller 10/15/75 called a large road nail with washer over steel pin. Cleveland 10/5/81 called a square iron rod. Wilcoxen 10/22/90 called a PK nail fd. Kiste 10/14/94 called a PK nail fd. Excavated 8/24/1999 by Wilcoxen and a 1" square rod was found 20" down. A Harrison Monument was set. Retied 10/1/2004 by Wilcoxen. Retied 7/21/09 by Wilcoxen.

REF.	DISTANCE	DESCRIPTION
1.	71.48'	NW corner of brick porch 4155 Troy Ave
2.	33.84'	Mag nail w/brass washer N PwP #16-627 4" up
3.	61.20'	Mag nail w/brass washer SW PwP #731-627 4" up
4.	119.69'	SE corner of church building (Southern wing)
5.	110.10'	SE corner of church building (Eastern wing)